

TITAN



ACCURATE. POWERFUL. SPACIOUS. ECONOMIC.

Versatile combined seed and fertilizer drill
for minimum tilling and traditional seeding.






Tume titan offers impressive seeding features,
which can be adapted for direct seeding as well.


- The fertilizer and seeds are sown through the same coulter, providing quick fertilization for seeds
- Accurate seeding depth, no vertical dispersion
- Exceptionally small tractor power requirement: all coulter components are rotating, no separate fertilizer coulters
- High capacity in seeding power and storage, easy and quick to adjust, low maintenance
- Equipped with a proven, accurate feeding system
- Extensive selection of accessories: combination of Titan and the CultiPack disk drill is excellent for sowing on stubble.

EASY TO USE, ADJUST AND MAINTAIN.

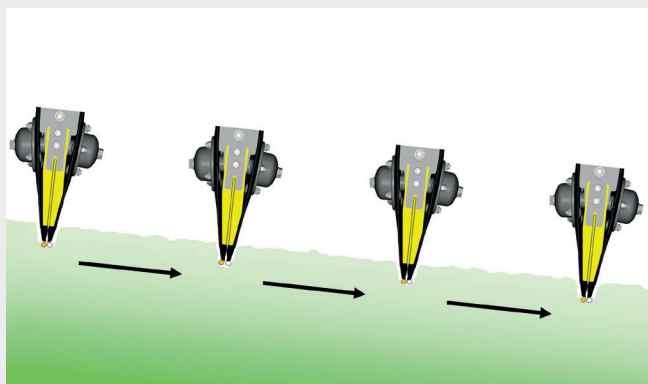

FIXED SEED INTERVALS

By dispensing the fertilizer and the seeds through the same coulter, the sowing pattern remains steady under all sowing conditions.

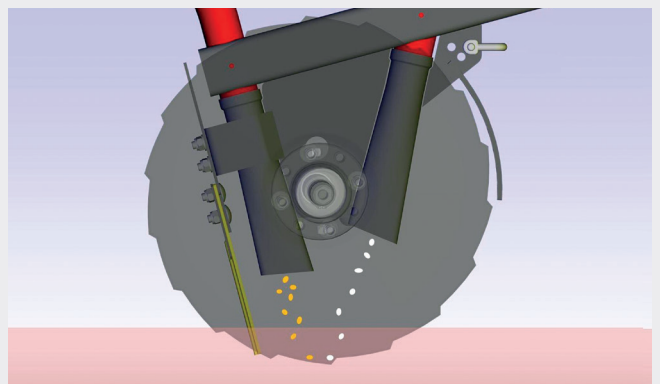

SECURE PLANTING

In order to ensure that seeds reach the seedbed, the fertilizer is fed through the front side of the coulter disc. This way the seed feeder tube can be positioned as far forward as possible. Furthermore, any soil spilling from the sides of the furrow will not result in vertical dispersion. Sowing is protected by discs.



EXCEPTIONALLY LOW POWER REQUIREMENT

With no scraping parts on the double-disc coulters, the tractive resistance of the unit is low. This saves fuel and power. Even a larger seed drill is less likely to require a change into a larger tractor.



LARGE HOPPER CAPACITY

Depending on working width and feeding amounts, you can sow 5 to 7 hectares with a single fill. The height of the divider wall is adjustable. The efficiency of the hopper capacity can be maximised across the adjustment range. The entire capacity can be used for seeds, if necessary.



EASY-TO-ADJUST COULTER WEIGHT

The coulters weight can be adjusted hydraulically during runtime. The maximum coulters weight is a healthy 60 kg.



EASY AND FAST ROTATION TEST

Titan provides ease of use for working. For example, running a rotation test is designed to be the easiest and fastest on the market.

RELIABILITY AND EASE OF USE. LOW MAINTENANCE.

The easy-to-adjust TC is budget and nature friendly.




**DRIVETRAIN WHEELS PERFORM
ACCURATELY AND RELIABLY.**

**OPEN STRUCTURE MAKES CLEANING AND SERVICE EASY.
FOR EXAMPLE FERTILIZER HOSES CAN BE EASILY TAKEN
IN FRONT FOR CLEANING.**

NO UNNECESSARY ADJUSTMENTS AND MAINTENANCE.


Tume Titan's design is based on reliability and durability. Thanks to Titan's technology the fertilizer depth does not need to be adjusted individually. The adjustment is performed together with seeding depth. Furthermore, Titan features no mechanical cranks. The simplicity of running a rotation test means that users will actually run the tests.

The unit is easy to maintain thanks to fewer maintainable parts that are also easier to maintain. Furthermore, Titan has no adjustable, consumable components. The feeder wheels significantly reduce the wear and tear and maintenance requirements on drivetrain chains.

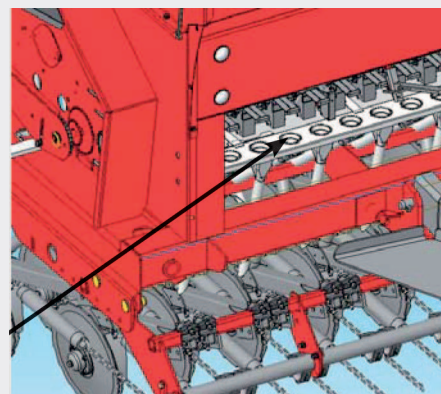

ROBUST AND MODERN **T#C**-CONTROLLER


SEEDING MENU

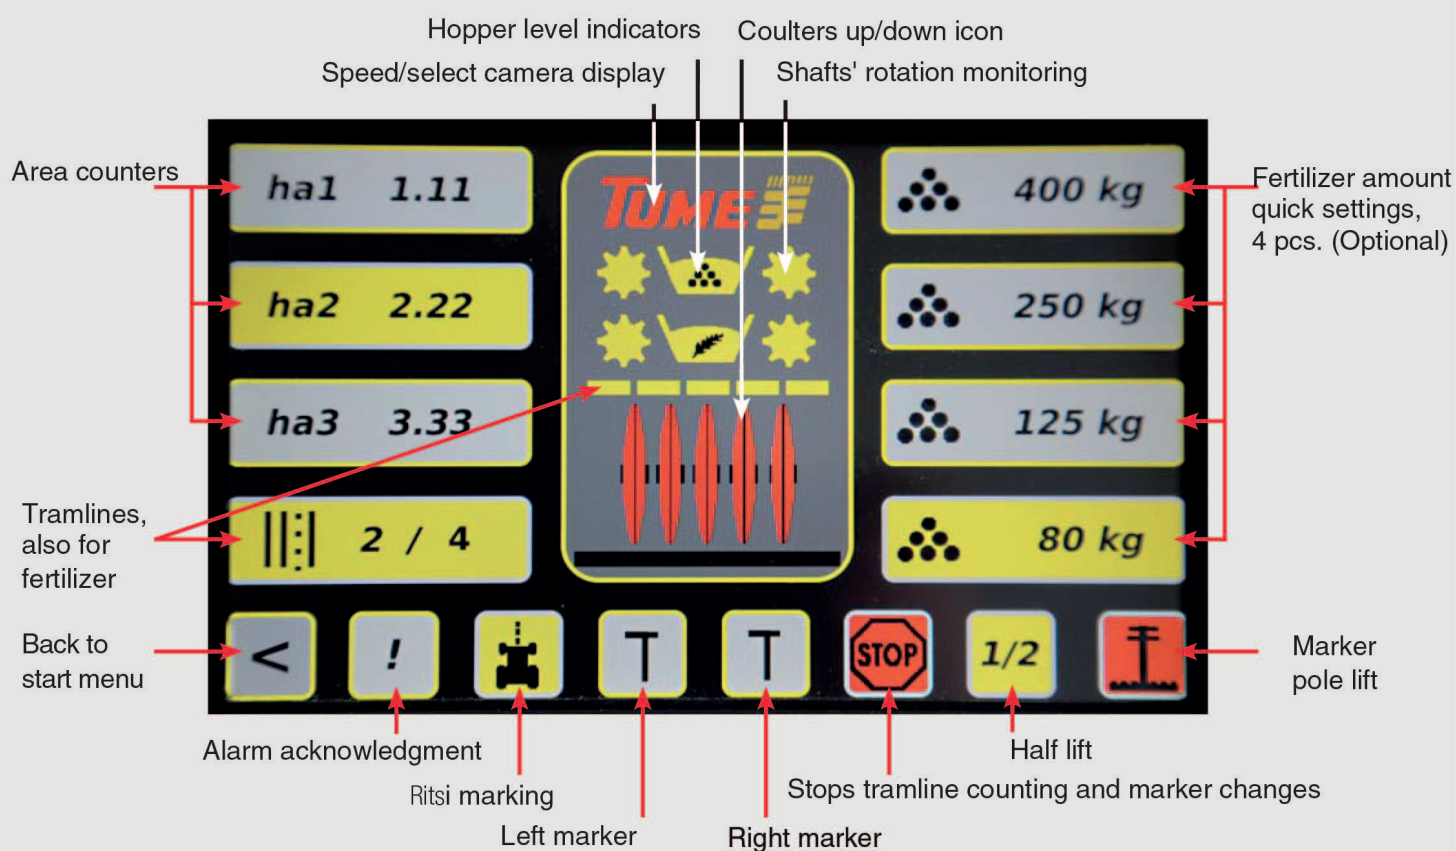

SETTINGS



SERVICE SCREEN

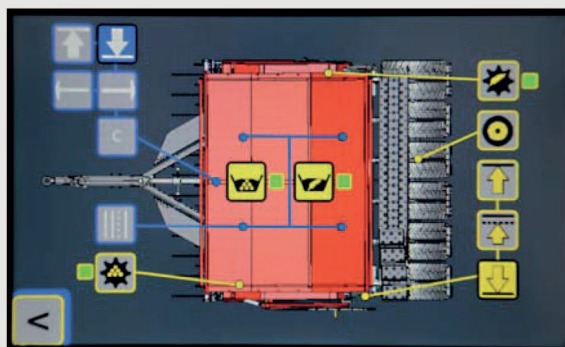

VERSATILE ACCESSORIES.



Front roller



Middle packer



CultiPack cultivator
Multi-use drawbar



Hydraulic
tramline markers

TECHNICAL DATA Titan

	3000	4000
Working and transportation width, mm	3000	4000
Hopper capacity, m ³	4.07	5.64
Max. seed capacity, m ³	2.9	4.01
Min. seed capacity, m ³	1.72	2.38
Max. fertilizer capacity, m ³	2.35	3.26
Min. fertilizer capacity, m ³	1.17	1.32
Basic unit weight, kg	3050	3850
Loading height, cm	208	208
Max. coulter weight, kg/coulter	60	60
Runtime weight adjustment	Standard	Standard
Number of coulters	24	32
Coulter disk diameter, mm	360	360
Min. traction power requirement hp/kW	90/66	120/88
Packer wheel size	7.50-16	7.50-16
Number of wheels	12	16

Standard equipment: TC controller // Rear harrow // Hydraulic coulter weight control // Fertilizer screens // Self-coiling tar-paulin cover // Lighting
Optional accessories: Markers // Seed dressing device // Hydraulic front roller // Agitators // Seed screens // Rear handrail // Front steps // Middle packer // TCPlus // CultiPack // Multi-use drawbar // Hybrid cassette



TUME-AGRI Oy

P.O. Box 77, FI-14201 TURENKI, Finland
 Tel. +358 207 433 060, fax +358 3 688 2305
 www.tumeagri.fi